


Looking toward tomorrow with fresh visions

Universal **HI-LIFE** Polyester Cord V-Belts are the result of years of experience and practical exercise combining optimum strength and flexibility with marked resistance to wear.

Anil Gupta
Anil Gupta
President

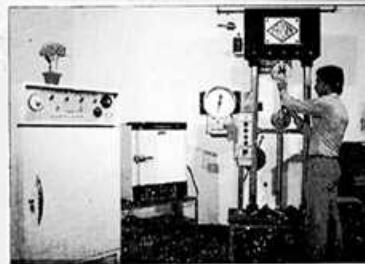

In-house evaluation of Finished Belt on Tensile Testing Machine in the Lab.

HARVESTER COMBINES BELTS

Made up of tough tensile members with specially formulated Rubber compound for cord and outer-jackets to withstand the prevalent rough and tough conditions.

SECTION	NOMINAL TOP WIDTH mm	NOMINAL THICKNESS mm	SIZE RANGE mm	SPECIFICATION
HL	45.0	20.0	2170 - 4000 Lw	ISO : 3410
HM	50.0	22.0	1825 - 4000 Lw	

List of various harvester combine Belts.

1. Universal — Polyester Russian Transmission Belts.

- a) 3570 x 50 x 22 mm.
- b) 2350 x 50 x 22 mm.

2. Universal — Polyester GDR Transmission & Flat Belts.

- a) 3570 x 50 x 22 mm.
- b) 2150 x 50 x 22 mm.
- c) 1140 x 36 x 14 mm. (Blower Belts)
- d) 3925 x 137.5 x 6 mm. (Flat Belts)

3. Universal — Polyester Swaraj Transmission/Flat Belt.

- a) 2920 x 50 x 22 mm.
- b) 2150 x 50 x 22 mm.
- c) 1140 x 36 x 14 mm.
- d) 3925 x 137.5 x 6 mm. (Flat Belts)

4. Universal — Polyester JOHN DEERE 630 Tr. Belts.

- a) 3175 x 50 x 22 mm.
- b) 2035 x 50 x 22 mm.
- c) 3350 x 100 x 6 mm. (Flat Belts)
- d) 3350 x 114 x 6 mm. (Flat Belts)
- e) 3450 x 114 x 6 mm. (Flat Belts)
- f) 3450 x 125 x 6 mm. (Flat Belts)
- g) 3350 x 125 x 6 mm. (Flat Belts)
- h) 3200 x 46 x 6 mm. (Flat Belts)

5. Universal — Polyester JOHN DEERE 330 Guide Drum & Flat Belts.


- a) 2035 x 50 x 22 mm.
- b) 3350 x 75 x 6 mm. (Flat Belts)

6. Universal — Polyester LAVERDA S4 Tr. Belts.

- a) 2500 x 40 x 22 mm.
- b) 1825 x 50 x 22 mm.


7. Universal — Polyester CLASS ESPI-515 Tr. Belts & Flat Belts.

- a) 2170 x 50 x 22 mm.
- b) 1825 x 50 x 22 mm.
- c) 2 Grooves (Small)
- d) 2 Grooves (Big)
- e) 2 Grooves (Flat)

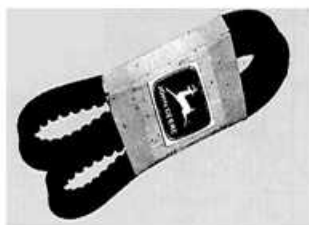

Compound processing in mixing mill.

CLASSICAL RANGE OF SECTION & SIZES

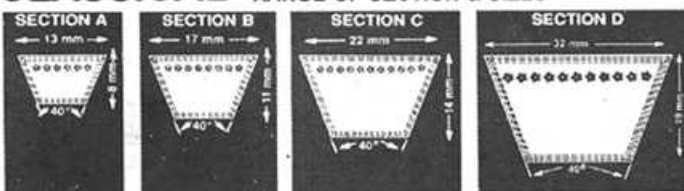

(Conforming to IS : 2494, DIN 7753 and BS 3790)

Range of Nominal Inside Length

INFORMATION TO BE SUPPLIED WITH ENQUIRY OR ORDER

- (i) Section
- (ii) Size in inches or mm
- (iii) Quantity in nos.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
16-180	406-4572	24-360	610-9144	36-600	916-15240	75-600	1905-15240